

PRIMARY AND SECONDARY BELT CLEANING

ชุดทำความสะอาดสายพานลำเลียงอัตโนมัติ



Primary Belt Clean



Features:

1. for belts 500-2000 mm
2. replaceable PU blade
3. easy installation
4. low maintenance
5. self-adjusting tensioner
6. extend belt life


Application:

1. Belts Width 500-2000 mm
2. Belt Speed ≤ 3.5 (m/s)
3. easy installation
4. low maintenance
5. self-adjusting tensioner
6. extend belt life

Installed on the head pulley to provide effective cleaning.


Wear-resistant polyurethane blade doesn't damage the belt and extend belt life.

Self-adjusting spring tensioners make sure consistent pressure and effective cleaning. When the blade wears or the belt jumps, the scraper will follow up automatically to ensure good contact.

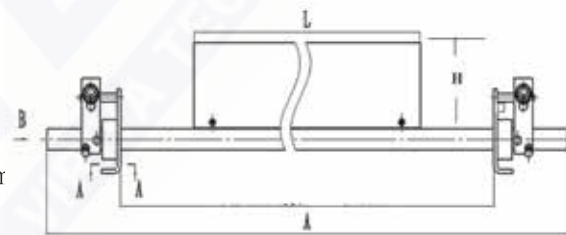

Primary Belt Clean

Model	Belt Width (mm)	Blade Width L (mm)	Pole Length A (mm)	Blade Height H (mm)
ZE-HPU-50	500	400	1500	185/210
ZE-HPU-65	650	500	1600	185/210
ZE-HPU-80	800	600	1800	185/210
ZE-HPU-100	1000	800	2000	185/210
ZE-HPU-120	1200	1000	2200	185/210
ZE-HPU-140	1400	1200	2400	185/210
ZE-HPU-160	1600	1400	2600	185/210
ZE-HPU-180	1800	1600	2800	185/210
ZE-HPU-200	2000	1800	3000	185/210

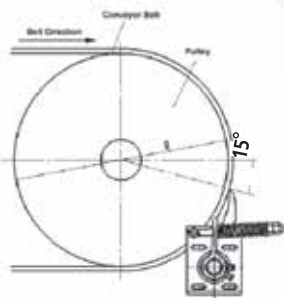

Secondary Belt Clean

Application:


1. Belt Width: 500-2000mm:
2. Belt Speed: 3.5 (m/s)
3. Temperature: -40-90 °C
4. Material Humidity: $\leq 15\%$



Secondary Belt Clean

Model	Belt Width (mm)	Blade Width L (mm)	Pole Length A (mm)	Blade Height H (mm)	Weight (Kg)
ZE-HPU-50	500	500	1500	160	19
ZE-HPU-65	650	600	1600	160	22
ZE-HPU-80	800	800	1800	160	25
ZE-HPU-100	1000	1000	2000	160	28
ZE-HPU-120	1200	1200	2200	160	31
ZE-HPU-140	1400	1400	2400	160	34
ZE-HPU-160	1600	1600	2600	160	37
ZE-HPU-180	1800	1800	2800	160	40
ZE-HPU-200	2000	2000	3000	160	43

The PU blade has the following advantages:
 wear-resistance
 anti-corrosion
 anti-fracture
 Hydrolysis

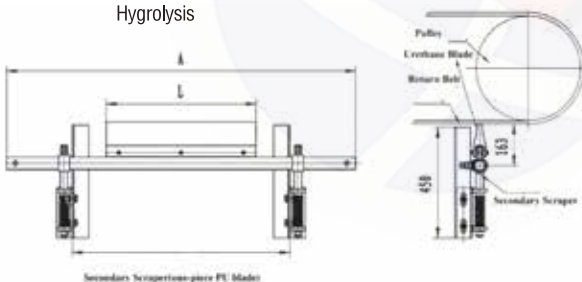

Secondary Scraper-piece PU Blade